


visplay

Manual 2023


Mono 12

**Modular systems for
commercial interiors**

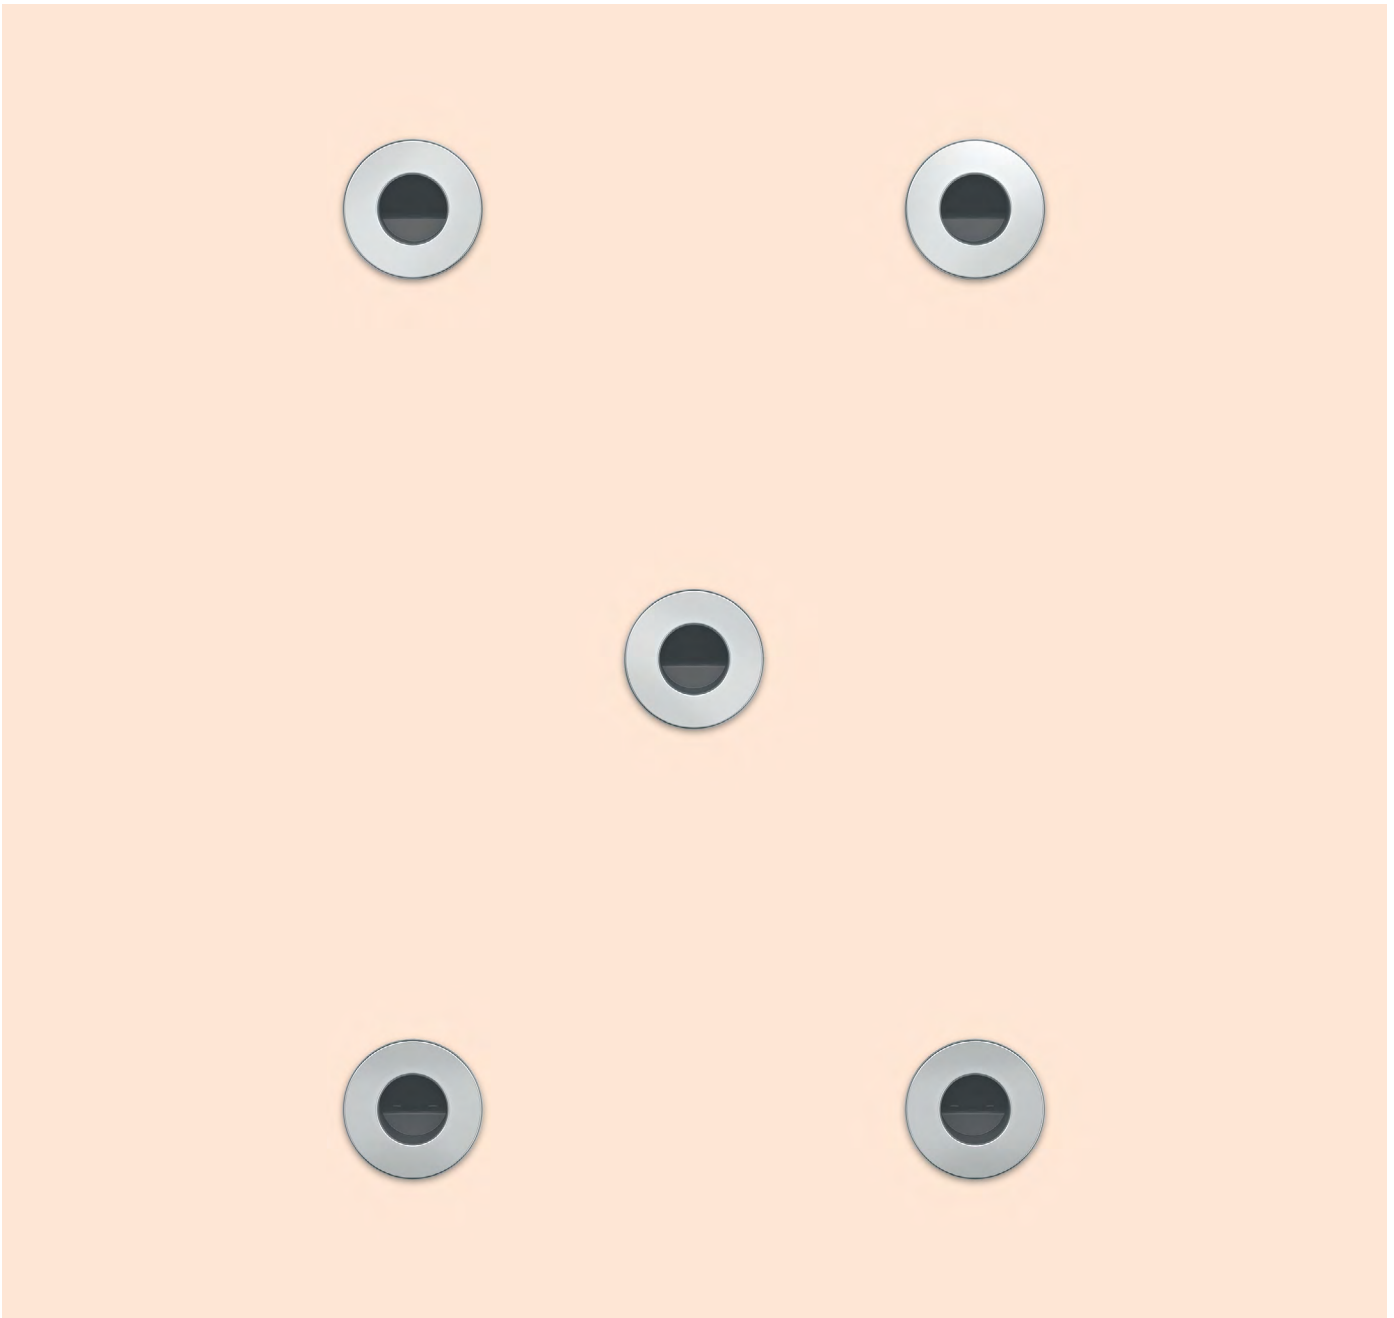


Mono 12 is a versatile single point support system that lends structure to walls through creative layout options. The unobtrusive holders (inner diameter 12 mm) are easily installed in wall panels and used with diverse merchandise supports and fittings, which are simply hooked into place. Once inserted, the merchandise supports are safely secured against twisting or unintentional removal with a catch. The holder is also available in the plastic version *Mono 12 Q*, which has a smaller outer diameter and is ideal for displaying light-weight merchandise.


Mono 12 holder set for wooden panels






Mono 12 holder set for glass panels



Mono 12 light holder set for wooden panels



Dimensions



Characteristics

Max. weight load = 15 kg per holder

- ⓘ Observe the assembly and operating instruction

Max. weight load = 10 kg per holder

- ⓘ Observe the assembly and operating instruction

Plastic.

Max. weight load = 8 kg per holder

- ⓘ Observe the assembly and operating instruction

Order number



silk
⊙ **979-448.30**

silk
⊙ **979-449.30**

silver
⊙ **323-647.05**

Set of 10 pcs, each with 4 screws.


Front arm, straight Ø 12 mm



Max. weight load = 10 kg

silk	
150 mm	977-781.30
300 mm	⊙ 977-782.30

Bracket Ø 12 mm for hanging rail Ø 15 mm




Coat-hangers can slide along the entire length of the hanging rail.

Max. weight load = 10 kg per bracket

silk	
	987-939.30

At least 2 brackets are required per hanging rail.

Hanging rail Ø 15 mm





To be inserted into brackets for hanging rail.

silk	
lto 520-2445 mm	906-329.30

520-845 mm => 2 brackets
 846-1245 mm => 3 brackets
 1246-1645 mm => 4 brackets
 1646-2445 mm => 5 brackets

Bracket Ø 12 mm for wooden or glass shelf



Max. weight load = 10 kg per bracket

Max. display depth = 320 mm

- 🔗 Drawing no.: 286-613 Glass shelf 8 mm
- 🔗 Drawing no.: 286-612 Wooden shelf

silk	
	⊙ 977-785.30

At least 2 brackets are required per shelf. Shelf supports for glass shelf must be ordered separately.

Shelf support for glass shelf



Plastic.

Are inserted on to pins of brackets for wooden and glass shelf, when using glass shelves.

silver


979-446.05

Set of 4 pcs.

Sliss



100 x 



Prevents scratches on hanging rails and front arms in silk or stainless steel.

To clip into coat hanger hook (Ø 3.4–3.8 mm).

transparent

929-449.02

Set of 100 pcs.

Standard surface finishes for basic system



silk

Standard surface finishes for merchandise supports



silk

ISO 9001 / ISO 14001

The safety of Visplay products is continuously monitored by external testing institutes, Intertek Germany and UL (Underwriters Laboratories Inc.).

For electrified systems, the CE marking confirms conformity with the relevant directives.

All processes in our company are subject to a comprehensive management system which corresponds with the ISO 9001 quality standard and the ISO 14001 environment standard.

Copyright ©

All products by Visplay and their names are protected by intellectual property rights. This protection is valid for the basic system along with the merchandise supports and accessories.

In the event of infringement, Visplay reserves the right to take legal steps.

- Our general conditions of delivery and sale are valid for all orders.
- We reserve the right to make technical and formal alterations.



All dimensions are given in millimetres.

lto = Length to order

hto = Height to order

cto = Colour to order

L = Length

A = Axis

H = Height

T = Depth

Quick delivery program

The following symbols which appear on the left-hand side near the part number indicate the delivery time for each individual item:

- = Delivery time: up to 5 working days ex works Weil am Rhein, Germany
- ⊙ = Delivery time: up to 10 working days ex works Weil am Rhein, Germany

All other items on request.

Longer delivery times may occur in the event of exceptionally strong demand.

Air freight

Items which are to be dispatched by air must not exceed a total length of 3 metres.

📄 Drawings of wooden and glass shelves

Production drawings of shelves with the 6 digit part number are available for download in the download centre at www.visplay.com or can be received on request.

📖 Assembly and operating instructions

Special assembly and operating instructions exist for all products by Visplay in order to guarantee the functions and safety. These instructions contain important information e.g. maximum weight loads, assembly dimensions or information on the correct assembly and use. The respective assembly and operating instructions are included in the delivery of our systems. A general catalogue is also available on request for planning purposes. The assembly and operating instructions are available for download in the product area and in the download centre at www.visplay.com.

You can get in touch with us by email or by phone.
Contact details for our offices can be found here:
www.visplay.com/contact

visplay

www.visplay.com info@visplay.com